

The brand-new HighTec full speed

Label & BagTag Printer OP 54-2 btp




good reasons to use it

- Engineered with the highest Optima quality at the lowest price. The dynamic and robust Optima OP 54-2 btp thermal printer features high performance 203 dpi resolution at 10 inches (260 mm) per second throughput speed.
- The heavy duty metal frame provides durability and user friendly quick loading of label media.
- For extended compatibility, the OP 54-2 btp printer features the Extended AEA-Mode for bi-colour Baggage Tag Printing.
- The industry standard emulations along with Optima´s own powerful command language to allow users to take advantage of the extra functionality of this printer.
- The Optima OP 54-2 btp features a unique modular design that is flexible and expandable allowing for a wide range of interfaces and accessories.
- The standard Memory allows the printer to be used in stand alone unique applications. Standard interfaces include a serial port RS 232 C, optional parallel and USB.
- Optional features include an Barcode printout verification and RFID (ISO15693/13,56 MHz).

technical characteristics

Feature.....	OP 54-2 btp
Printing Principles	Direct Thermal (monochrome und Bi-Color)
Resolution	8 dot/mm (203 dpi)
Printing Speed	up to 260 mm/s
Print Length	max. 1.000 mm
Media Width	54 mm
Fonts	scalable, Bitmap-Fonts
Types of bar codes include	- Interleaved 2 of 5 - Interleaved 2 of 5 including Check-Digit - Industrial 2 of 5 - Industrial 2 of 5 including Check-Digit - Code 39 - Code 39 including Check-Digit
CPU	Sharp 78520, 32 Bit, ARM 7 Core
On-Board Memory	8 or 16 MB RAM ; 8 MB Flash
Interfaces	RS 232 C, Centronics parallel, PS/2 Optional: Ethernet, USB, W-LAN ...
Keyboard	2 Print button only
Print Direktionen for Text, Images, Lines, an Boxes	4
Outer Paper Roll Diameter	max. 184 mm (according IATA Resolution 740)
Monitoring System	- Automatic paper feed - Paper end synchronisation
Dimensions (W x D x H mm)	200 x 408 x 216
Weight (excl. Paper and options) ...	5,1 kg
Sound Emission Level	< 45 dB (A)
Main Voltage	230/115 VAC, 50/60 Hz, automatic
Ambient Operating Temperature ...	+5°C - +45°C
Humidity	10 - 80% non-condensing
Optional	RFID (ISO 15693 / 13,56 MHz)
Emulation	- Extended AEA-Mode (bag tag Printing) - XML-Emulation

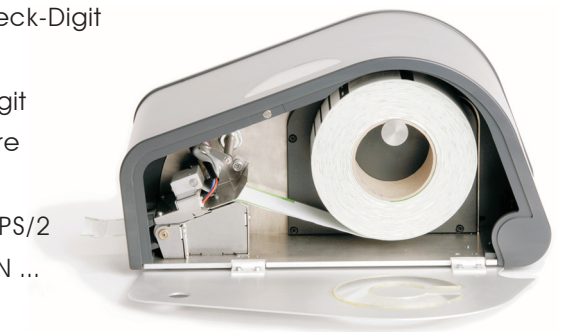

Optima Printsystems AG
Bäckerstraße 14
D-25709 Marne
Phone +49-(0)48 51-9 56 98 30
Fax +49-(0)48 51-9 56 98 31
contact@optima-printsystems.com
www.optima-printsystems.com

This printer will inspire you
Design: MUTSCHLER.WINKLER

The new OP 54-2 btp
Simply quicker, softer, safer!